

# FBA11J 10M/14L



eMINEBEA.COM

## 一般仕様 General Specifications

### FBA11J10M

◇許容環境温度範囲：-40℃ to +40℃ (65%RH) (Operating)  
-40℃ to +70℃ (65%RH) (Storage)  
実用上さしつかえない状態で結露無きこと

◇ Allowable Ambient Temperature Range :  
-40℃ to +40℃ (65%RH) (Operating)  
-40℃ to +70℃ (65%RH) (Storage)  
No such condensation as hinders practical use

### FBA11J14L

◇許容環境温度範囲：-20℃ to +40℃ (65%RH) (Operating)  
-40℃ to +70℃ (65%RH) (Storage)  
実用上さしつかえない状態で結露無きこと

◇ Allowable Ambient Temperature Range :  
-20℃ to +40℃ (65%RH) (Operating)  
-40℃ to +70℃ (65%RH) (Storage)  
No such condensation as hinders practical use

## 期待できる寿命

### Expected Life

#### FBA11J10M

※故障率 10%  
70,000時間 (-30℃)


※ Failure rate 10%  
70,000 hours (-30℃)

#### FBA11J14L

※故障率 10%  
70,000時間 (-10℃)


※ Failure rate 10%  
70,000 hours (-10℃)

## 外觀図 Outline

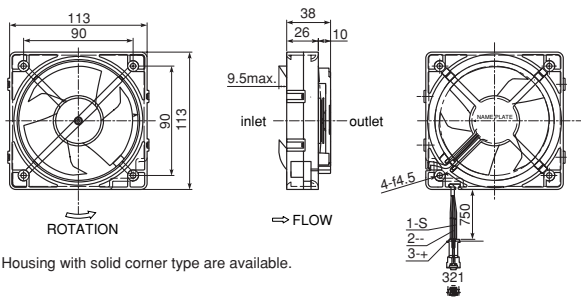


※ Housing with solid corner type are available.

## 特性曲線 Characteristic Curves

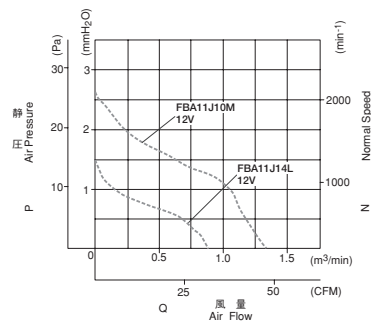

## 取付穴参考寸法 Panel Out-cuts



吸入側(INLET SIDE)

## 材質 Material

◇軸受 : ハイドロウェーブベアリング

◇Bearing : Hydro Wave Bearing

## 仕様 Specifications

型式 Model	定格電圧 Rated Voltage	使用電圧範囲 Operating Voltage	定格電流 Current	定格入力 Input Power	定格回転速度 Rated Speed	最大風量 Maximum Air Flow		最大静圧 Maximum Air Pressure		騒音 Noise
	(V)		(mA)*1	(W)*1		(min <sup>-1</sup> )*1	(m <sup>3</sup> /min)*1	(CFM)*1	(Pa)*1	
FBA11J10M	9	7.0 to 14	102	0.92	1920	1.02	36.0	17.0	1.73	24
FBA11J14L	14		63	0.88	2100	1.12	39.5	21.0	2.14	25

回転方向：ラベルから見て時計方向  
風吹き出し方向：ラベル側

Rotation: Clockwise as seen from the label side.  
Airflow Outlet: Label side

\*1: Average Values in Free Air