

## 产品说明 General Data

耐压Dielectric withstand voltage: AC 1500V (50/60Hz) one minute  
 安全保护Protection: Impedance protection or thermal protection  
 工作温度Operating Temperature: Ball bearing: -20°C~+75°C  
 Sleeve bearing: -10°C~+70°C


使用寿命Life Expectancy: Ball bearing: over 40000 hr. (At 40°C)  
 Sleeve bearing: over 15000 hr. (At 40°C)

安规认证Safety: UL>CUL>TUV>CE>CCC

重量Weight: 870g  
 尺寸图Outline



风量Airflow: 282 ~ 365 m<sup>3</sup>/hr 166~215 CFM

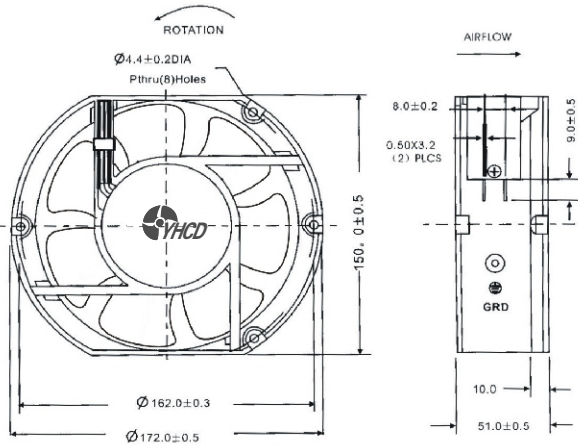

## 材料 Material


外框 Frame: Aluminum alloy

风叶 Impeller: Plastic 94V-0 PBT covering glass fiber



马达 Motor: Shaded pole induction motor

连接方式 Connection: Lead wire or terminal type

## 开孔尺寸 Panel Cut-outs



## 曲线图 Characteristic Curves

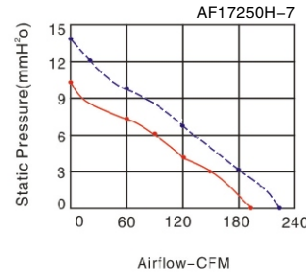

## 技术参数 Specifications

| Model<br>(型号)              | Bearing system<br>(轴承型式) | Voltage<br>VAC<br>(电压) | Freq.<br>Hz<br>(频率) | Current<br>A<br>(电流) | Power<br>W<br>(功率) | Speed<br>RPM<br>(转速) | Noise<br>dBA<br>(噪音) | Air Flow (风量) |         | Phase<br>(相数) | Capacitor<br>(电容) |
|----------------------------|--------------------------|------------------------|---------------------|----------------------|--------------------|----------------------|----------------------|---------------|---------|---------------|-------------------|
|                            |                          |                        |                     |                      |                    |                      |                      | M3/hr         | CFM     |               |                   |
| AF17250HA,S-7              | Sleeve                   | 100-120                | 50/60               | 0.4                  | 40                 | 2500/2800            | 52/56                | 326/365       | 192/215 | 1             | /                 |
| AF17250HA <sub>2</sub> S-7 |                          | 200-240                | 50/60               | 0.22                 | 40                 | 2500/2800            | 52/56                | 326/365       | 192/215 | 1             | /                 |
| AF17250HA,B-7              | Sleeve                   | 100-120                | 50/60               | 0.4                  | 40                 | 2500/2800            | 52/56                | 326/365       | 192/215 | 1             | /                 |
| AF17250HA <sub>2</sub> B-7 |                          | 200-240                | 50/60               | 0.22                 | 40                 | 2500/2800            | 52/56                | 326/365       | 192/215 | 1             | /                 |
| AF17250MA,S-7              | Ball                     | 100-120                | 50/60               | 0.35                 | 37                 | 2200/2500            | 49/53                | 282/326       | 166/192 | 1             | /                 |
| AF17250MA <sub>2</sub> S-7 |                          | 200-240                | 50/60               | 0.19                 | 37                 | 2200/2500            | 49/53                | 282/326       | 166/192 | 1             | /                 |
| AF17250MA,B-7              | Ball                     | 100-120                | 50/60               | 0.35                 | 37                 | 2200/2500            | 49/53                | 282/326       | 166/192 | 1             | /                 |
| AF17250MA <sub>2</sub> B-7 |                          | 200-240                | 50/60               | 0.19                 | 37                 | 2200/2500            | 49/53                | 282/326       | 166/191 | 1             | /                 |