


◀ **92X92X25mm Series** ▶



Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,

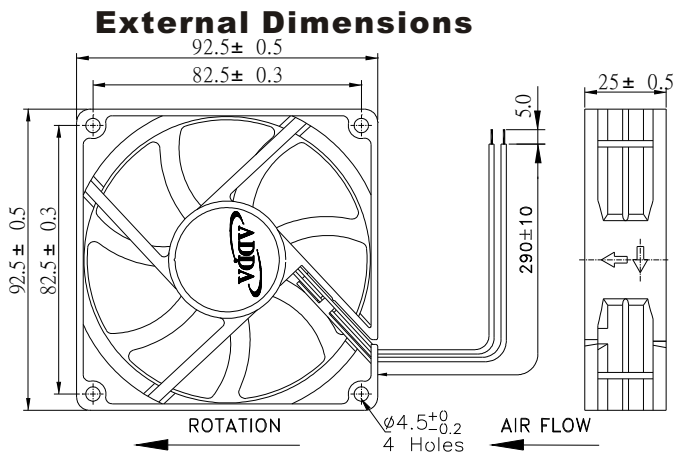


Frame: Plastic (UL:94v-0)  
 Impeller: Plastic (UL:94v-0)  
 Bearing: Hypro bearing  
 Lead wire: UL1007AWG24  
 OPERATING TEMP\*: -10C~70C  
 VOLTAGE AVAILABLE: 12V, 24V, 48V  
 \*:-10C~60C for fans with sleeve/ball combination bearings.

\*: Noise is measured at the distance of one (1) meter from the axis of intake.

**Specifications (Nominal)**

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
92X92X25	AD0912UB-A70GL		12	0.30	3.60	3300	1.595	56.62	0.175	4.38	39.4	101
	AD0912HB-A70GL		12	0.25	3.00	2900	1.389	49.30	0.120	2.99	35.0	
	AD0912MB-A70GL		12	0.17	2.04	2400	1.169	41.49	0.090	2.25	31.3	
	AD0912LB-A70GL		12	0.13	1.56	2050	0.979	34.75	0.066	1.65	25.0	
	AD0912DB-A70GL		12	0.09	1.08	1600	0.753	26.72	0.044	1.09	18.0	
	AD0912UB-A71GL		12	0.39	4.68	3300	1.604	56.95	0.153	3.82	39.4	
	AD0912HB-A71GL		12	0.25	3.00	2900	1.400	49.69	0.116	2.89	35.0	
	AD0912MB-A71GL		12	0.17	2.04	2600	1.246	44.25	0.101	2.53	32.7	
	AD0912LB-A71GL		12	0.12	1.44	2300	1.064	37.76	0.078	1.94	29.8	
	AD0912DB-A71GL		12	0.07	0.84	1600	0.753	26.72	0.044	1.09	18.0	
	AD0924XB-A71GL		24	0.25	6.00	3800	1.868	66.32	0.218	5.45	45.0	
	AD0924UB-A71GL		24	0.21	5.04	3300	1.604	56.95	0.153	3.82	39.4	
	AD0924HB-A71GL		24	0.15	3.60	2900	1.400	49.69	0.116	2.89	35.0	
	AD0924MB-A71GL		24	0.12	2.88	2600	1.246	44.25	0.101	2.53	32.7	
	AD0924HB-A7AGL		24	0.15	3.60	2700	1.316	46.72	0.118	2.94	33.7	
	AD0948HB-A70GL		48	0.11	5.28	2900	1.389	49.30	0.120	2.99	35.0	
AD0948UB-A71GL		48	0.16	7.68	3500	1.717	60.95	0.177	4.42	42.0		
AD0948HB-A71GL		48	0.13	6.24	2900	1.389	49.30	0.120	2.99	35.0		

Specifications subject to change without notice.

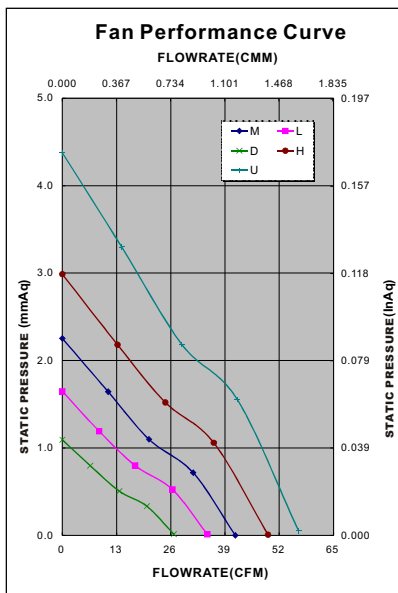

\*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓				✓	

\*Safety approvals

✓	✓		✓	✓	

