


◀ **35X35X10mm Series** ▶



External Dimensions

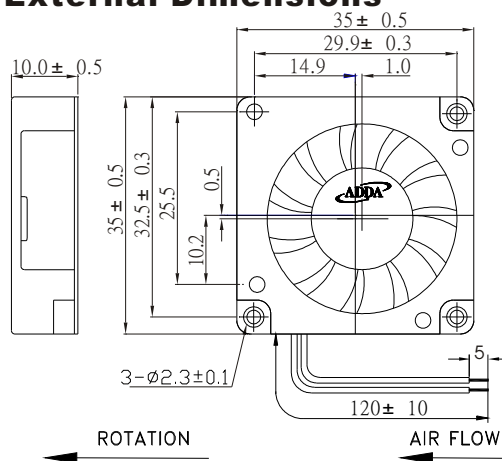

Frame: Plastic(UL:94v-0)
 Impeller: Plastic(UL:94v-0)
 Bearing: Hypro bearing
 Lead wire: UL1571AWG28
 OPERATING TEMP*: -10C~70C
 VOLTAGE AVAILABLE: 5V, 12V
 *: -10C~60C for fans with sleeve/ball combination bearings.


Spot cooling, also suitable for small space requirements, laptops PC and notebook, etc.,

Specifications(Nominal)

*: Noise is measured at the distance of one(1) meter from the axis of intake.

Frame size (mm)	Model No.	Bearing System Type	Rated Voltage (v)	Rated Current (A)	Rated Power (W)	Rated Speed (rpm)	Maximum AirFlow		Maximum Pressure		Noise Level (dB/A)	Weight (g)
							(CMM)	(CFM)	(InAq)	(mmAq)		
35x35x10	AB3505LB-GA0	=Ball =Sleeve =1B1S =Hypro bearing	5	0.09	0.450	5000	0.026	0.91	0.042	1.05	23.0	16
	AB3505MX-GA0		5	0.11	0.550	6000	0.035	1.22	0.153	3.84	27.5	
	AB3505HX-GA0		5	0.17	0.850	7000	0.043	1.52	0.199	4.98	30.7	
	AB3512LX-GA0		12	0.11	0.132	5000	0.026	0.91	0.042	1.05	23.0	
	AB3512MB-GA0		12	0.09	0.108	6000	0.035	1.22	0.153	3.84	27.5	
	AB3512HB-GA0		12	0.10	0.120	7000	0.043	1.52	0.199	4.98	30.7	
	AB3505LB-GA6		5	0.09	0.450	5000	0.026	0.91	0.042	1.05	23.0	
	AB3505MX-GA6		5	0.11	0.550	6000	0.035	1.22	0.153	3.84	27.5	
	AB3505HX-GA6		5	0.17	0.850	7000	0.043	1.52	0.199	4.98	30.7	
	AB3512LX-GA6		12	0.11	0.132	5000	0.026	0.91	0.042	1.05	23.0	
	AB3512MB-GA6		12	0.09	0.108	6000	0.035	1.22	0.153	3.84	27.5	
	AB3512HB-GA6		12	0.10	0.120	7000	0.043	1.52	0.199	4.98	30.7	

Specifications subject to change without notice.

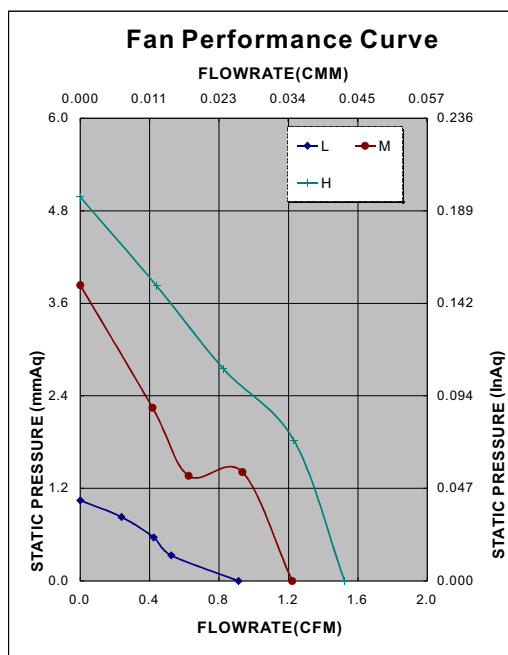

*Motor protective circuit and third lead wire functions

0	1	2	3	4	6	7	8	9	A	B
✓	✓	✓	✓		✓					✓

*Safety approvals

✓	✓		✓	✓	

